


15 NV

- Oilfield tough
- Pressure seal lip type packing
- Ball bearing upthrust
- Main bearing – Full Apex roller
- Oil lubrication – 4.5 gallons
- Two (2) needle roller bearings for maximum shaft alignment
- Saver sub to 4 ½" Reg LH pin
- Shank adapter available

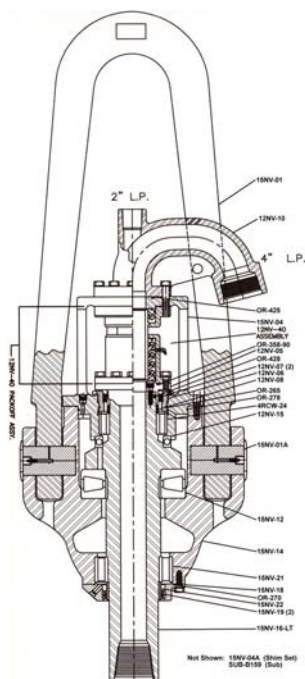

TECHNICAL

LENGTH	WIDTH	WEIGHT	HOSE CONN.	LOWER CONN.	FLUID PASSAGE	WORKING PRESSURE
93"	27"	3960#	4" FEMALE LINE PIPE	5 ½" REG LH BOX	3"	TO 4500 PSI

WEIGHT CAPACITY

STATIC	ROTATING
150 TONS	97 TONS @ 100 RPM (API)

PARTS LIST

PART NUMBER	NAME	QTY. REQ.	
15NV-6720-XX	SWIVEL, BAIL, 4" LINE PIPE HOSE CONNECTION, 2" NPT FEMALE WIRELINE PASSAGE, 4 ½" FULL HOLE LH BOX STEM WITH 6 5/8" REG LH PIN SAVER SUB		
15NV-01	BAIL	1	
15NV-01A	BAIL PIN	2	
15NV-02	RETAINER, BAIL PIN	2	
15NV-04	BONNET	1	
15NV-04A	SHIM SET	1	
12NV-05	ADAPTER SPINDLE	1	
12NV-05A	BOLT, ADAPTER SPINDLE	8	
12NV-06	RETAINER, BEARING	1	
12NV-07	SEAL, UPPER HOUSING	2	
12NV-08	SPACER, UPPER BEARING	1	
15NV-12	BEARING, MAIN	1	
15NV-14	HOUSING, BEARING	1	
15NV-14B	BUMPER PADS RUBBER	OPTION	
12NV-15	BEARING, UPTHURST	1	
15NV-16-LT	STEM, 4 ½" FH LH BOX	1	
15NV-18	BOX, LOWER OIL	1	
15NV-19	SEAL, LOWER OIL	2	
15NV-21	BEARING, LOWER ALIGNMENT	1	
15NV-22	SLEEVE, WEAR	1	
12NV-10	GOOSENECK	1	
SUB-B159	SUB, 4 ½" FH LH PIN BY 6 5/8" REG LH PIN	1	
4RCW-24	BEARING, UPPER ALIGNMENT	1	
12NV-40	PACKING CAPSULE	1	
OR-425	O RING (GOOSENECK)	1	
OR-358-90	O RING (SPINDLE ADAPTER)	1	
OR-428	O RING (STEM)	1	
OR-265	O RING (BEARING RETAINER)	1	
OR-278	O RING (BONNET)	1	
OR-270	O RING (OIL BOX)	1	

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

