


Side Inlet Special Swivel 5.7PE

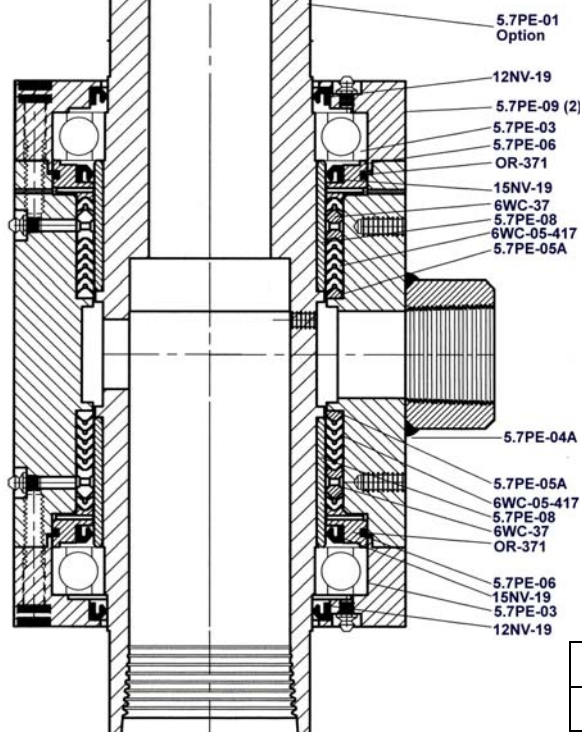

- Alloy Steel Construction
- Simple Bolt Together Design
- Angular Contact Ball Bearings on Each End for Maximum Shaft Alignment
- Grease Lubricated Packing & Bearing
- Replaceable Packing Wear Sleeves
- Simple Field Maintenance
- For Conventional and Dual Tube Drilling

TECHNICAL DATA

LENGTH	WIDTH	WEIGHT	HOSE CONN.	UPPER CONN.	LOWER CONN.	WATERCOURSE	WORKING PRESSURE
26 3/4"	11"		TO 3" NPT	4" IF	OPTION	TO 3 1/2"	TO 1500 PSI

PARTS LIST

PART NUMBER	DESCRIPTION	NUMBER REQ.	
5.7PE-4900-01	SIDE INLET, 4" IF RH PIN UPPER CONNECTION, 2 1/2" NPT FEMALE HOSE CONNECTION WITH 5 1/2" CSR RH BOX LOWER CONNECTION, LESS AIR NEEDLE		
	ADD FOR "SPECIAL STEM"		
12NV-19	LOWER OIL SEALS	2	
15NV-19	LOWER HOUSING SEALS	2	
5.7PE-011E-X**	STEM 4" IF RH PIN X 5 1/2" CSR RH BOX	OPTION	
5.7PE-03	BEARINGS	2	
5.7PE-04A	PACKOFF HOUSING, 2 1/2" NPT FEMALE	1	
5.7PE-05A	BOTTOM PACKING GLAND	2	
5.7PE-06	TOP PACKING GLAND	2	
5.7PE-08	WEAR SLEEVE	2	
5.7PE-09	BEARING HOUSING	2	
6WC-05-417	PACKING SET, 417 HIGH PRESSURE	2	
6WC-37	LANTERN RING	2	
OR-371	O-RING	2	

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

