



BP SEAL ASSEMBLY BP SEAL TYPE

This assembly features:



- Full control of the well screen while going into the well casing
- Allows for washout and cleaning of the production zone after the screen is set.
- Allows the well screen to be drilled down some if necessary.
- Screen is sealed into well casing after screen and production zone are cleaned.
- This system will help develop cleaner, trouble-free water well.

Features of items in assembly:

- B.P. SEAL is threaded onto top of well screen and sealed after cleaning. An additional sealing trip is required.
- WASHPLUG is used to center and seal the customer provided washtube. This provides better flow and pressure to clean the formation.
- BACK PRESSURE VALVE is used to seal the bottom of well screen after washing is completed.
- SAW TOOTH NIPPLE is used to protect the valve and allows the screen to be drilled down if necessary, also provides resistance while un-threading from this assembly.

SCREEN	CASING	BP SEAL	WASHPLUG	VALVE	SAW-TOOTH NIPPLE
2				BP-VALVE-02.0	BP-S.T.NIP-02.0
2 ½	4	BP-RR2124	BP-WP212114	BP-VALVE-02.5	BP-S.T.NIP-02.5
		BP-RL2124		BP-VALVE-02.5x1	
		BP-RL212412			
		BP-RR212412			
3	5	BP-RR35	BP-WP3114	BP-VALVE-03.0	BP-S.T.NIP-03.0
		BP-RL35		BP-VALVE-03.0x2	
4	6	BP-RR46	BP-WP42	BP-VALVE-04.0	BP-S.T.NIP-04.0
		BP-RL46		BP-VALVE-04x2	
5	6	BP-WP56			
6	8	BP-RR68	BP-WP62	BP-VALVE-06.0*	BP-S.T. NIP-06.0
		BP-RL68			
8	10	BP-RR810	BP-WP82	BP-VALVE-08.0*	BP-S.T.NIP-08.0
		BP-RL810			
10	12	BP-RR1012	BP-WP102	BP-VALVE-10.0*	BP-S.T.NIP-10.0
12		BP-RL1012	BP-WP122	BP-VALVE-12.0*	

*AVAILABLE IN BRONZE OR IRON CONSTRUCTION. STAINLESS STEEL AVAILABLE

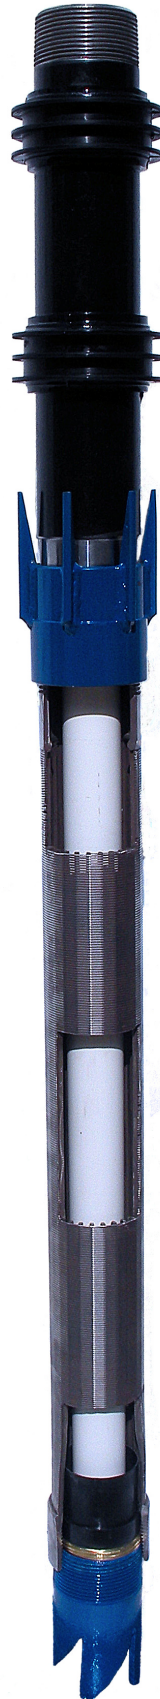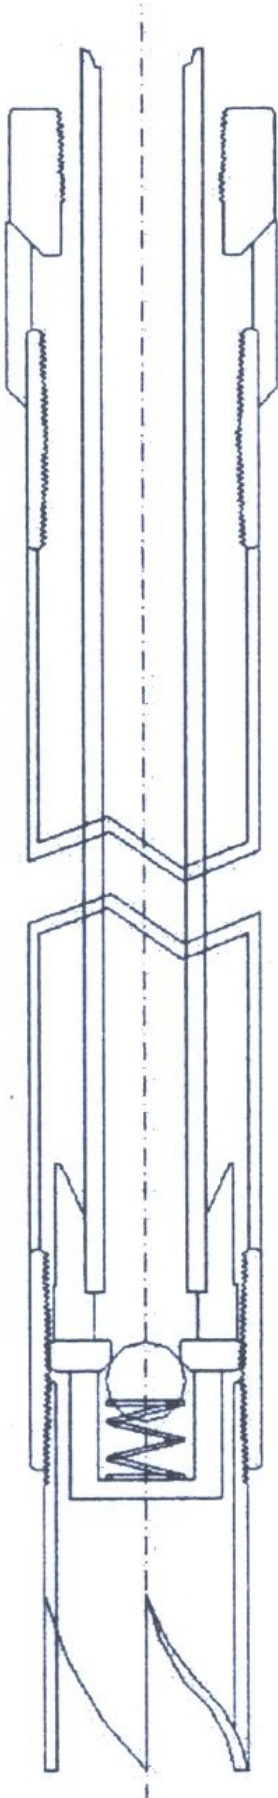



BP WELL SEAL



- Available for 4", 5", 6", 8", 10", 12", and 14" well casing
- Two (2) side opening for wires or additional pipe.
- O-Ring sealed in the ID of WELL SEAL and drop pipe.
- 4", 5" and 6" are constructed from lightweight high strength aluminum alloy.
- 8", 10", 12" and 14" are a two-piece, alloy steel construction design.
- Available with a large section of drop pipe sizes.
- Easy on – off design.
- Uses weight of drop pipe to seal on well casing.

CASING SIZE	DROP PIPE SIZE					
	1"	1 ¼"	1 ½"	2"	2 ½"	3"
4"	BP-WS-04.00-1.00	BP-WS-04.00-1.25	BP-WS-04.00-1.50	BP-WS-04.00-2.00	BP-WS-04.00-2.50	BP-WS-04.00-3.00
4 ½" (5OD)	BP-WS-04.50-1.00	BP-WS-04.50-1.25	BP-WS-04.50-1.50	BP-WS-04.50-2.00	BP-WS-04.50-2.50	BP-WS-04.50-3.00
5"	BP-WS-05.00-1.00	BP-WS-05.00-1.25	BP-WP-05.00-1.50	BP-WS-05.00-2.00	BP-WS-05.00-2.50	BP-WS-5.00-3.00
6"	BP-WS-06.00-1.00	BP-WS-06.00-1.25	BP-WS-06.00-1.50	BP-WS-06.00-2.00	BP-WS-06.00-2.50	BP-WS-06.00-3.00
8"	BP-WS-08.00-1.00	BP-WS-08.00-1.25	BP-WS-08.00-1.50	BP-WS-08.00-2.00	BP-WS-08.00-2.50	BP-WS-08.00-3.00
10"	BP-WS-10.00-1.00	BP-WS-10.00-1.25	BP-WS-10.00-1.50	BP-WS-10.00-2.00	BP-WS-10.00-2.50	BP-WS-10.00-3.00
12"	BP-WS-12.00-1.00	BP-WS-12.00-1.25	BP-WS-12.00-1.50	BP-WS-12.00-2.00	BP-WS-12.00-2.50	BP-WS-12.00-3.00
14"	BP-WS-14.00-1.00	BP-WS-14.00-1.25	BP-WS-14.00-1.50	BP-WS-14.00-2.00	BP-WS-14.00-2.50	BP-WS-14.00-3.00

OTHER SIZES OF DROP PIPE AVAILABLE – CONSULT FACTORY

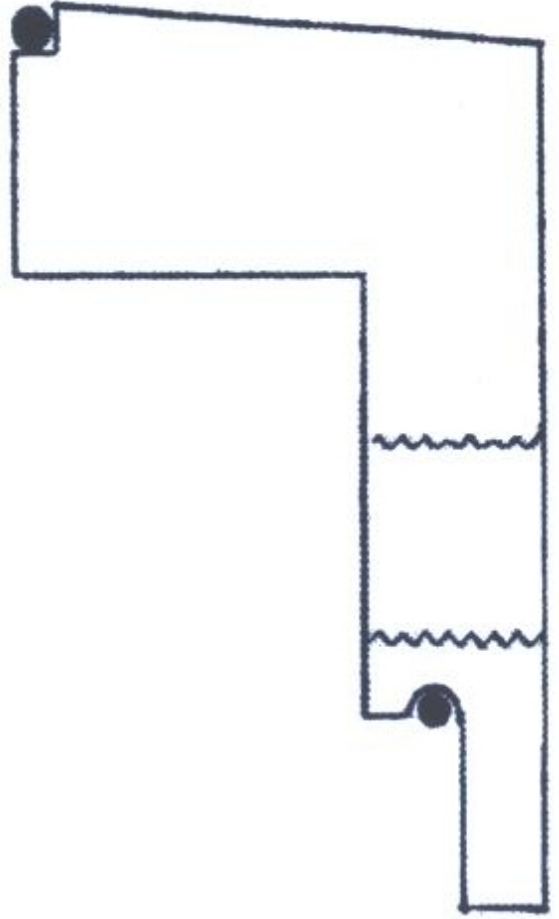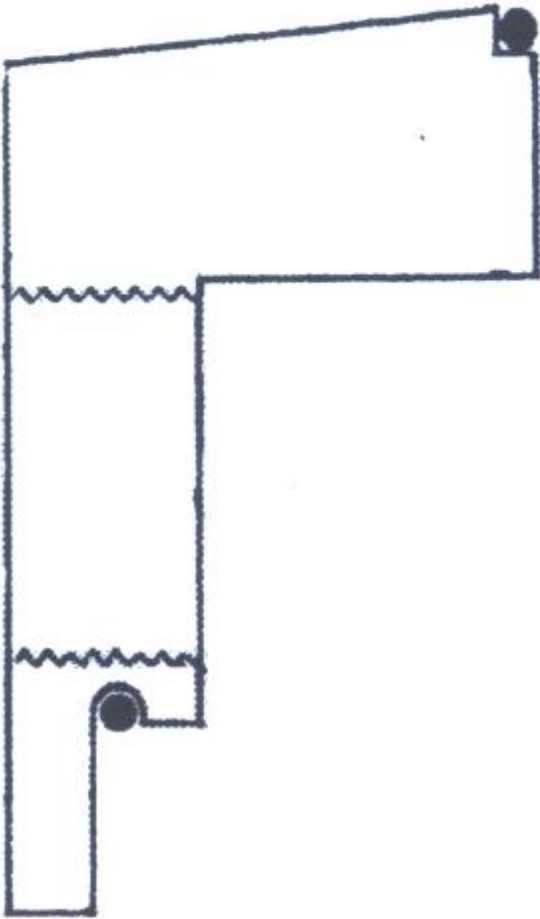

COMING SOON:

- **Tapered Nipple Assembly**
- **Centralizing Coupling**
- **Lug Coupling**