


1.5 JW ROTATING HEAD

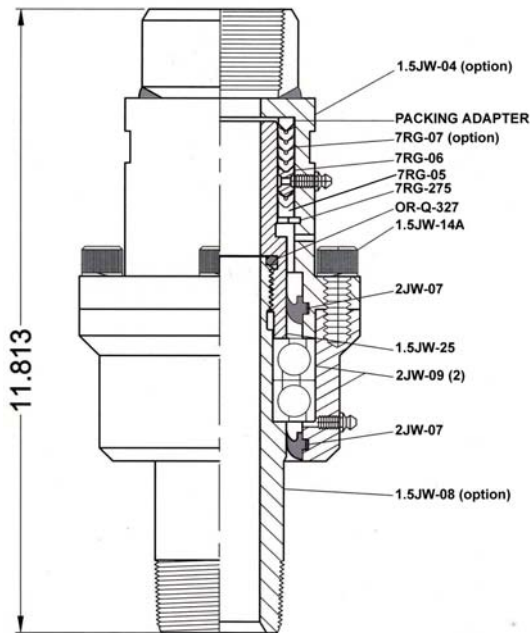

- Fluid Passage to 1 ½”
- Compact Design
- Thrust ball bearings for pressure and radial load support
- Choice of hose and lower connection threads
- Easy field maintenance and repair

TECHNICAL DATA

LENGTH	WIDTH	WEIGHT	HOSE CONN.	LOWER CONN.	WATERCOURSE	WORKING PRESSURE
12 ½”	5 3/16”	9 ¼”	2” NPT Male	2” NPT RHP	1 ½”	To 2500 PSI

WEIGHT CAPACITY DESIGNED FOR PRESSURE LOAD ONLY

PARTS LIST

PART NUMBER	NAME	WT/LBS	NUMBER REQ.	
1.5JW-2070-XX	ROTATING HEAD, 2” NPT MALE HOSE CONNECTION WITH 2” NPT LH PIN LOWER CONNECTION			
	ADD FOR “SPECIAL STEM”			
1.5JW-04A	GOOSENECK, 2” NPT MALE HOSE CONNECTION		1	
1.5JW-08DA-RP	SPINDLE, 1 ½” NPT RH PIN		Option	
1.5JW-08EA-LP	SPINDLE, 2” NPT LH PIN		1	
1.5JW-14	BEARING HOUSING		1	
1.5JW-25	WASHPIPE		1	
OR-Q327	WASHPIPE QUAD RING		1	
2JW-07	HOUSING SEAL		2	
2JW-09	BEARINGS		2	
7RG-275	PACKING RETAINER		1	
7RG-05	PACKING SEAT RING		1	
7RG-06	LANTERN RING		1	
7RG-07	PACKING SET W/ADAPTER		1	

Other sizes of connections available, please consult factory.

Option for above swivel, may affect pricing of complete swivel. Other options available, please consult factory.

